

## Compact II


### 180W LED High Bay Specification




#### Parameters

Product Model	HBU-180W-120D-DALI
LED Chip Brand	Nichia
Light Efficiency	≥150 lm/W ( 130lm/W Optional )
Luminous Flux	>27000 lm
Color Temperature	4500 ~ 5500K(2500 ~ 5500K optional)
Beam Angle	120° (90°、60°optional)
Total Power Consumption	180W±10W
Output Current	5.6A (constant current)
Output Voltage	DC 30-36V
Net Weight	4.1KG±0.2kg (with driver)
Light Dimensions	L280mm×W280mm×H174.5mm
Light Package Dimensions	L360mm×W360mm×H255mm

#### Light Distribution

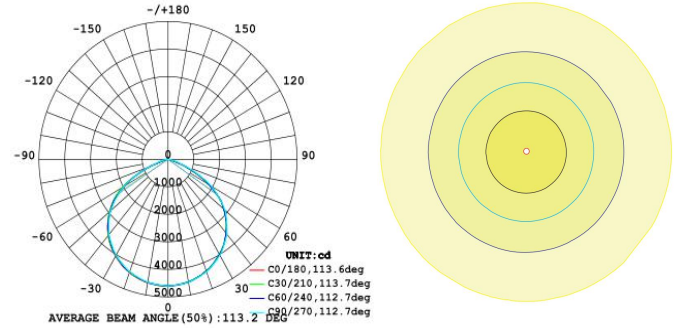

#### Physical Dimensions

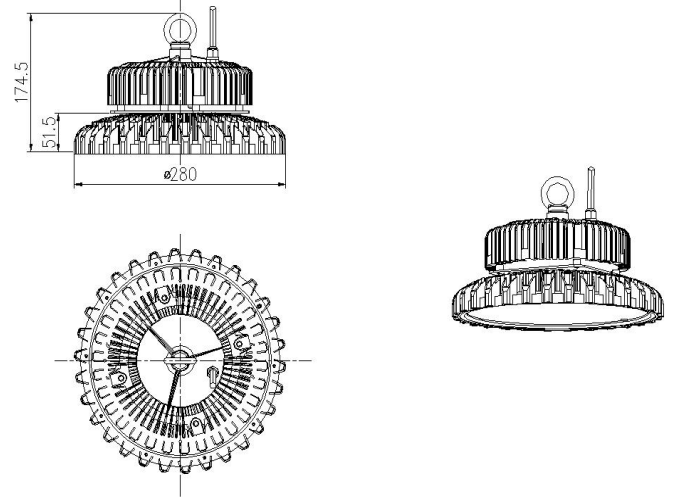

≥0.95	70 Ra	IP65	≥100000 Hrs	AC 100-277V	47-63Hz
Power Factor	CRI	IP Level	TM-21(L70)	Input Voltage	Power Frequency

#### Others

Power Efficiency	Working Temperature (Environment)	Heat Sink Surface Temperature
≥92%	-30°C ~ +50°C	78.8°C (Room Temperature26°C)
Fixture Efficiency	Working Humidity (Environment)	Luminaire Base Temperature
≥90%	15%~90%RH	88.2°C (Room Temperature26°C)
Total Harmonic Distortion	Storing Condition	LED Power Consumption
≤15%	-40°C ~ +65°C	170W±10W

Suitable for Workshop, Warehouse, Gymnasium, Gas station, Shopping mall, Garage and other Lighting Purposes